



# X-BT-ER M8, M10/W10 SN 8

2197511-09.2022

**BUREAU VERITAS** TYPE APPROVED  
**Lloyd's Register** TYPE APPROVED  
**RINA** TYPE-APPROVED PRODUCT  
**DNV** DNV/COM/AF

**A4 316** Equivalent Corrosion Resistance  
 Hilti Corrosion handbook / DFTM

X-BT-ER M8/7 SN 8	X-BT-ER M10/7 SN 8	X-BT-ER W10/7 SN 8	✓

Use with

SF BT 22-A SF BT 18-A	DX 351-BT	X-BT 1/4" - 20Nm/14,8 ft lb	X-IG BT M8 X-IG BT M10 X-IG BT W10

**1**

SF BT 22-A  
SF BT 18-A

**2**

**3**

**4**

**5**

DX 351 BT

**6**

X-BT-ER

**7**

≤ 200 N

2x

**8a**

Max. Min.

X-BT 26,8 mm

**8b**

≤ 5° > 5°

3x

Inclination gauge

**9a** **9b**

≥ 2mm  
5/64"



**10**

min. 8 Nm  
max. 20 Nm

**11**



	X-BT-ER M8/7 SN 8	
	X-BT-ER M10/7 SN 8	
	X-BT-ER W10/7 SN 8	

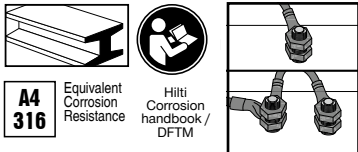

Use with

SF BT 22-A	BX 3-BT	X-BT 1/4" - 20Nm/14,8 ft lb	XiG BT M8 XiG BT M10 XiG BT W10

