


UL LISTED
[Rod Hanger]
E505554

Load rating for Product pre-mounted with nail: ALH 22 in steel application: [95lbs]; in concrete application: [70lbs]; ALH 27: [95lbs]. Corresponds with mechanical strength according to UL Standard for Hardware for the Support of Conduit Tubing and Cable, UL2239; Mounting Orientation: Horizontal.



1	ALH 27	ALH 22
DX 351-CT DX 351-ME, DX 351-ME + X-PT 351 DX 5 F8, DX 5 F8 + PT 5		DX 5 F8, DX 5 F8 + PT 5
DX 6 F8, DX 6 F8 + PT 6		DX 6 F8, DX 6 F8 + PT 6
PBH-S CRS	PBH-S	S-MD HWH3

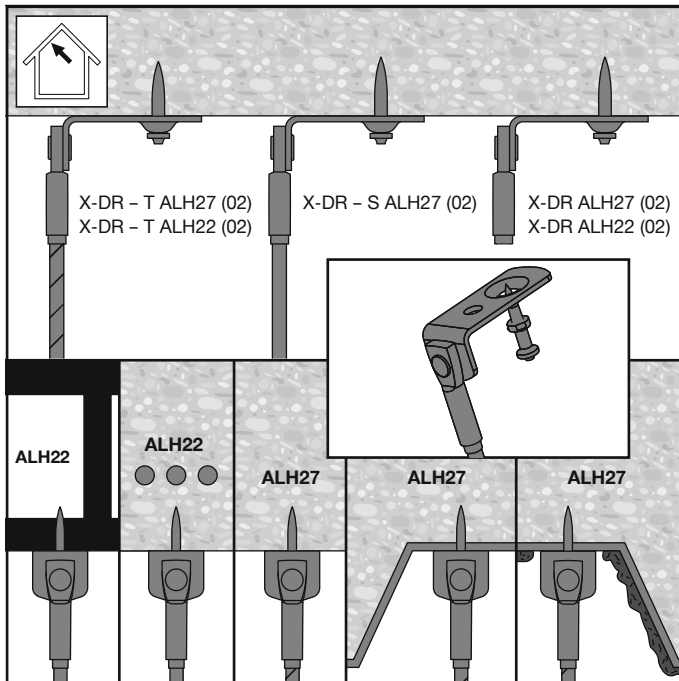